



Model SU125
SKU# 118711
USN# 334021017

Thermoplastic
**1/6 HP Submersible
Utility Pump**

- Corrosion resistant thermoplastic housing
- Removes water from basements, window wells, sinks and other flooded areas
- Easy, portable operation with 1" NPT discharge and garden hose adapter included
- Bottom suction design filters debris and removes water down to 1/4"
- Energy-efficient, Oil cooled, PSC motor with thermal overload protection



Performance

Discharge Flow (GPH)								
Model No.	HP	0'	5'	10'	15'	20'	25'	Max. lift
SU125	1/6	1500	1400	1300	1100	750	300	27'

Application

Submersible utility pump for general water transfer


Voltage	115
Amps	2.2
Hertz	60
Phase	Single
RPM	3450RPM
Motor type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit requirements	10 AMP
Duty rating	Continuous*
Shaft seal	Lip seal
Motor Shaft	Stainless steel
Upper motor bearing	Ball bearing
Lower motor bearing	Ball bearing
Cooling	Oil cooled
Motor protection	Auto reset thermal overload protector

*For continuous, the water depth must be at least 6" to prevent the motor from overheating

Pump Specifications

Discharge size	1" MNPT & garden hose adapter included
Cord Length	10'
Cord type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller material	Reinforced thermoplastic
Gasket	Rubber
Solids handling	1/8" spherical
Liquid temp. range	32°-95°F
Operation	Non-automatic
Fasteners	Stainless steel

Performance

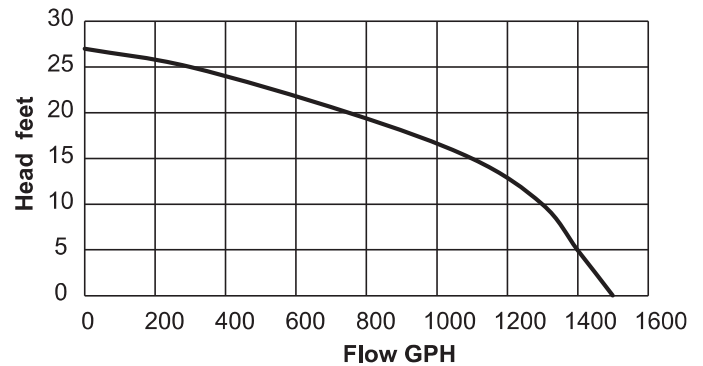

Dimensions

