



## WINDOW AIR CONDITIONER HEAT/COOL

Models: SW08R1-H  
SW12R2-H  
SW18R2-H  
SW25R2-H



**Window Air Conditioner Cooling&Heating  
Fits Standard Double Hung Windows**

### Specifications

Voltage (Unit Specific)	115 or 230/208 Vac
Frequency	60 HZ
Plug Rewired	LCDI NEMA Type
Control Panel	Digital Display & Interface
Temperature Display	Fahrenheit or Celsius
Timer Settings	Up to 24 Hours
Fans Speeds	High/Medium/Low
Refrigerant	Eco-Friendly R-410A
Filter	Reusable
Directional Air Louvers	4-Way Manual Control
Wireless Remote	Included
Installation Hardware	Included

### Mode Selection

Choose between fan, cooling, dehumidifying & automatic operation.

### Sleep Feature

Slowly increases room temperature by 4°F when activated and returns to the original temperature setting after 7 hours.

### Energy Saver Feature

Optimally manages system operation to minimize power consumption.

### Follow-Me Feature

Automatically adjusts thermostatic performance based on location of the remote.

### Check Filter Indicator

Light illuminates to notify when the filter needs to be cleaned or replaced.

### Auto-Restart

If power loss occurs, the system will automatically resume operation based on previous settings.

### Optimal Conditions for Cooling

Outdoor Temperature: 64-109°F

Indoor Temperature: 62-90°F

### Certifications

C-UL-US

CEC & DOE Listed

### Warranty

2-Year Limited Warranty on Entire Unit

5-Year Limited Warranty on Sealed System

For additional information, contact 1-800-431-3000


Seasons is a registered trademark of HD Supply Facilities Maintenance, Ltd.

Dimensions and specifications are subject to change without notice. Rev 8/20/2021





## WINDOW AIR CONDITIONER HEAT/COOL



Models: SW08R1-H  
SW12R2-H  
SW18R2-H  
SW25R2-H





Model #	SW08R1-H	SW12R2-H	SW18R2-H	SW25R2-H
Cooling Performance	Capacity (BTU/Hr)	8,000	12,000/11,600	18,500/18,200
	Current	6.4A	5.0/5.2A	7.7/8.3A
	Input Power	734W	1100/1064W	1729/1701W
	Refrigerant Type	R410a	R410a	R410a
	Refrigerant Charge Amount	380g	630g	820g
	Design Pressure (High/Low)	520/300 PSIG	520/300 PSIG	520/300 PSIG
General Performance	EER	10.9	10.9	9.4
	Airflow CFM (H/M/L)	260/231/202	280/258/228	453/415/377
	Room Area	251-350 sq. ft.	451-550 sq. ft.	701-1000 sq. ft.
	Max. Indoor Sound Level	57dBA	61dBA	59dBA
Electrical Specifications	Voltage	115V	230/208V	230/208V
	Frequency	60 Hz.	60 Hz.	60 Hz.
	NEMA Plug Configuration	5-15P	6-20P	6-30P
	Power Cord Length	6-1/2 Ft.	6-1/2 Ft.	6-1/2 Ft.
Dimensions	Net Weight	75 Lbs.	88 Lbs.	119 Lbs.
	Window Opening Width	26.8"-36"	26.8"-36"	28"-40-1/2"
	Window Opening Height	16-1/2" Min.	16-1/2" Min.	18-1/2" Min.

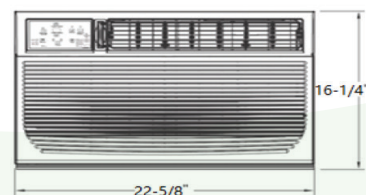

SW08R1-H  
SW12R2-H

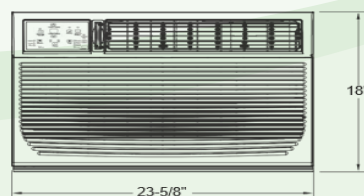

SW18R2-H

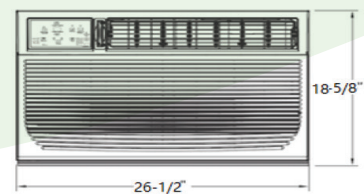

SW25R2-H

For additional information, contact 1-800-431-3000

Seasons is a registered trademark of HD Supply Facilities Maintenance, Ltd.

Dimensions and specifications are subject to change without notice. Rev 8/20/2021