


## SERVICE PARTS LIST

## **BULLETIN NO.** 54-04-0010

| SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS |            |                  |      | REVISED BULLETIN   | DATE      |
|--|------------|------------------|------|--------------------|-----------|
| M12™ and M18™ Multi Voltage Battery Charger            |            |                  |      | WILDING INJOIT     | Jan. 2013 |
| CATALOG NO.  | 48-59-1812 | SERIAL<br>NUMBER | D63A | WIRING INSTRUCTION |           |

**EXAMPLE**:

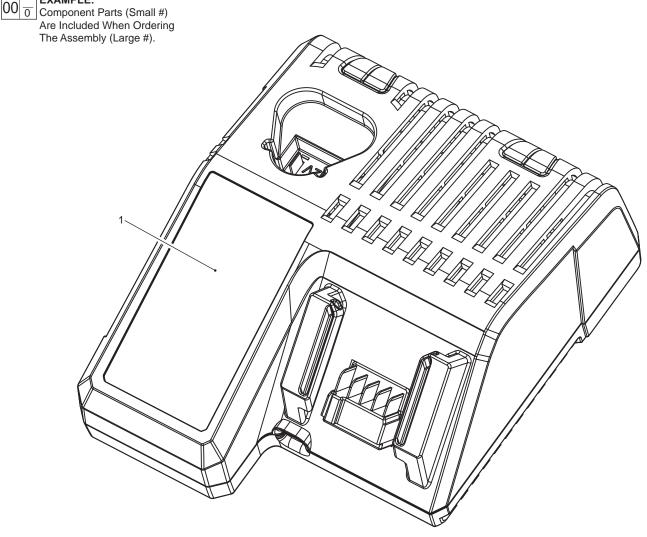

**DESCRIPTION OF PART** FIG. PART NO. NO. REQ. 12-20-1812 Service Nameplate (1)

## FIG. **NOTES**

A clean, dry surface is essential for proper performance for any adhesive system. The area intended for application of any adhesive label or nameplate must be prepared by cleaning with isopropyl alcohol. The solvent is to be applied with a clean, lint free applicator and the surface allowed to dry before applying the label or nameplate.